
			ROVIO 4 12-row			ROVIO 4 8-row					ROVIC 6-ro		
Front attachments		4.1275 C	4.1270 C	4.880 FC	4.875 C	4.875 FC	4.870 C	4.870 FC	4.680 FC	4.675 C	4.675 FC	4.670 C	4.670 FC
Number of rows		12	12	8	8	8	8	8	6	6	6	6	6
Row width	cm	75	70	80	75	75	70	70	80	75	75	70	70
Transport position – rigid		•	•	-	•	_	•	_	-	•	_	•	_
Transport position – folding		_	-	•	_	•	_	•	•	-	•	-	•
Horizontal chopper		•	•	•	•	•	•	•	•	•	•	•	•
Norking width	m	9.00	8.40	6.40	6.00	6.00	5.60	5.60	4.80	4.50	4.50	4.20	4.20
Transport width	m	9.78	8.63	3.25	6.18	3.18	5.83	3.18	3.25	4.68	3.18	4.43	3.18
Stubble breaker		•	•	•	•	•	•	•	•	•	•	•	•
Sunflower equipment		0	0	0	0	0	0	0	0	0	0	0	0
Hood extensions		0	0	0	0	0	0	0	0	0	0	0	0
Lodged maize augers		0	0	0	0	0	0	0	0	0	0	0	0
Shear bar kit		•	•	•	•	•	•	•	•	•	•	•	•
Sprocket for intake auger to increase speed		0	0	0	0	0	0	0	0	0	0	0	0
Electrohydraulic picking plate adjustment		•	•	•	•	•	•	•	•	•	•	•	•
Grain baffle for intake auger		•	•	•	•	•	•	•	•	•	•	•	•
Road transport protection incl. lighting and safety bar		-	-	•	-	•	-	•	•	-	•	-	•
Support for trailer		0	0	_	0	-	0	-	-	0	-	0	_
Neight	kg	4520	4450	3350	3000	3350	3000	2855	2650	2300	2650	2300	2650
Automatic cutterbar control													
AUTO CONTOUR		0	0	0	0	0	0	0	0	0	0	0	0
AUTO PILOT		0	0	0	0	0	0	0	0	0	0	0	0

Crop type matrix									
Crop type	VARIO	CERIO	CONVIO FLEX / CONVIO	MAXFLEX	Folding cutterbars	Standard cutterbars	ROVIO	SUNSPEED	SWATH UP
Grains	Х	X	X	X	X	X	-	-	X
Rapeseed	Х	-	Х	-	-	X <sup>1</sup>	-	-	X
Rice	Х	Х	Х	-	-	Х	-	-	Х
Sunflowers	-	-	-	-	-	-	X <sup>2</sup>	Х	-
Maize	-	-	-	-	-	-	Х	-	-
Grass	Х	Х	Х	X	Х	Х	-	-	Х
Beans	-	-	Х	X	-	-	-	-	-
Peas	-	-	Χ	Х	-	-	-	-	X

not possible



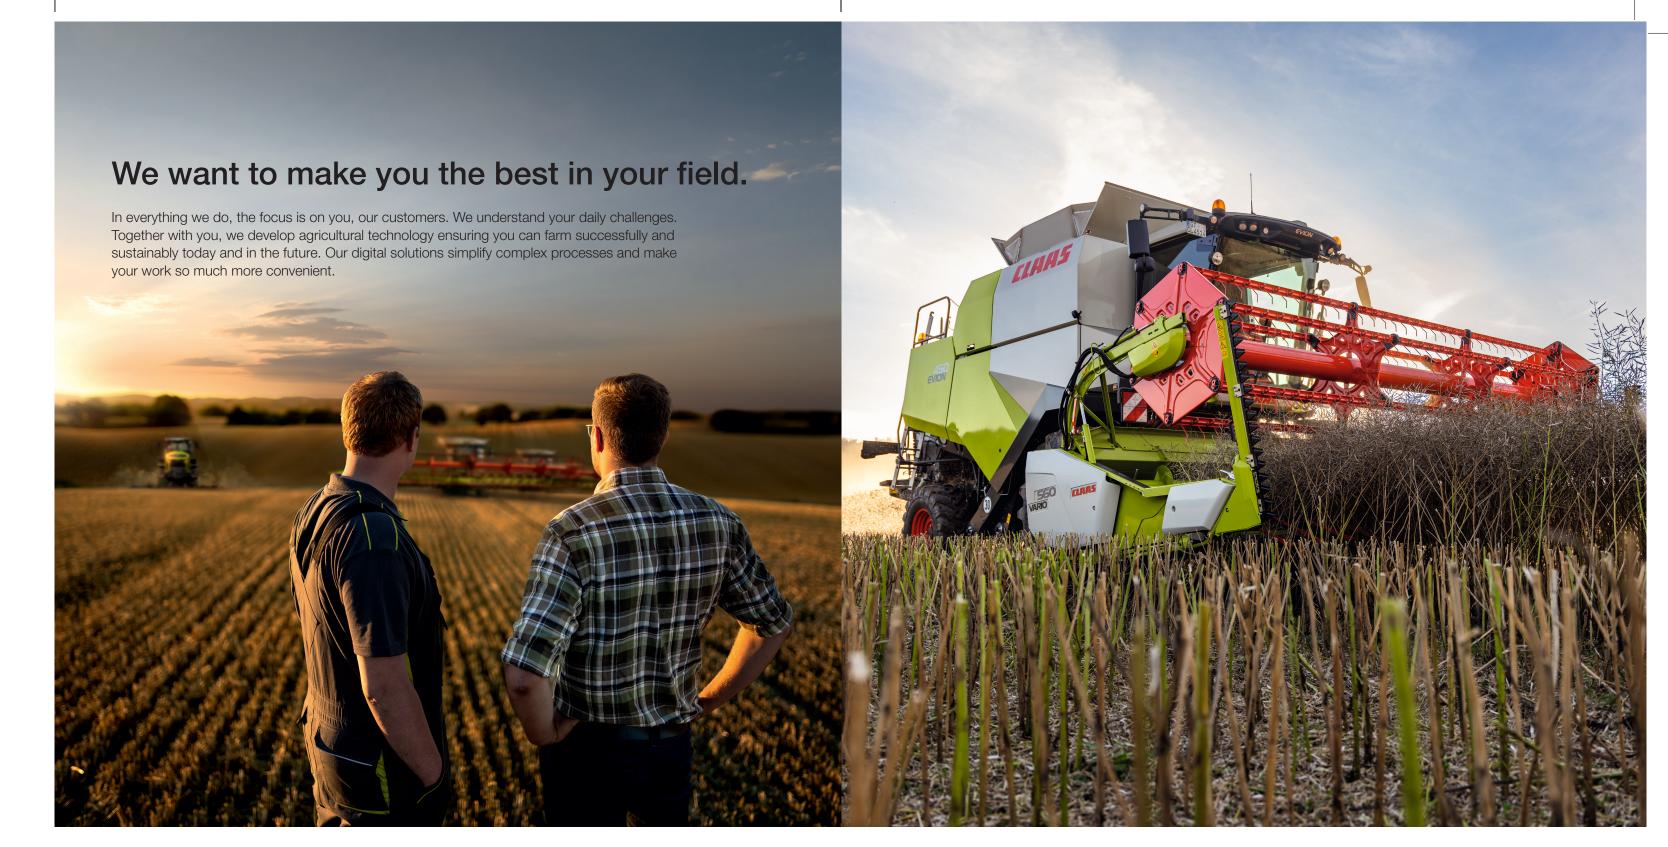

Front attachments

Combine harvester front attachments LEXION TRION EVION



CLAAS KGaA mbH Mühlenwinkel 1 33428 Harsewinkel Deutschland Tel. +49 5247 12-0 claas.com

160012000525 KK ME 1125

<sup>&</sup>lt;sup>1</sup> Rapeseed table required

<sup>&</sup>lt;sup>2</sup> Sunflower equipment required

Standard ○ Option □ Available — Not available



## CLAAS is a cut above in every crop.

CLAAS has exactly the right front attachment – for every machine, every job and every crop. You benefit from superior performance right from the start, whether you are harvesting grains, such as wheat, rye, barley, oats and triticale, or crops such as rapeseed, maize, sunflowers, rice, soybeans, flax, beans, lentils, millet and grass seed or clover seed.



		CONVIO F	LEX / CONVIC	)				VARIO cutterbars									CERIO cutterbars	c				Standard	cutterbars	Folding cu	utterbars
Front attachments		1530	1380	1230	1080	930	770	1380	1230	1080	930	770	680	620	560	500	930	770	680	620	560	C 490	C 430	C 540	C 450
Effective cutting width	mm	15392	13868	12344	10820	9296	7772	13790	12270	10740	9220	7696	6781	6172	5562	4953	9220	7696	6781	6172	5562	4920	4320	5460	4550
Effective cutting width	ft.	50.50	45.50	40.50	35.50	30.50	25.50	45.25	40.25	35.25	30.25	25.25	22.25	20.25	18.25	16.25	30.25	25.25	22.25	20.25	18.25	16.14	14.17	17.91	14.93
Drive on both sides	10	•	•	•	•	0	_	•	•	•	0	0	_	_	-	_	_	_	_	_	-	_	_	•	•
Drive on one side		_		_		0	•		_	_	•	•	•	•	•	•	•	•	•	•				_	
Grain crop dividers, folding		0	0	0	0	0	0	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Crop dividers adjustable for height without tools		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	_		_	
Soybean crop divider		0	0	0	0	0	0		_		Ĺ														
Spacing of knife bar to intake auger (min. / max)	mm	_	_	_	_	_	_	493/1134	493/1134	103/1131	/03/113/	1 /03/113/	1 /03/113/	1 /03/113/	493/1134	/03/113/	570	579	579	579	579	545	560	560	560
Knife divided	111111					0		433/1134	433/1134	433/1134	433/1134	433/1134	+ 433/1134	433/1134	+ 430/1104	433/1134	1 3/3	313	313	313	313	040	300	300	•
Knife undivided		•		•	•		_	•	•	_	_	_	_	_	_	_	_	_	_	_	_	_	_	•	
MULTIFINGER intake auger		•	_	_	•		•	_	_	_														_	
-						•	•		•		•	•	•	•	•			•			•	•	•	•	
Reel and auger bearing divided		•	•	•	•	-	_	•	•	•	_	-	-	-	-	_	_	_	_	_	_	_	_	•	•
Reel and auger bearing undivided		_	_	_	_	•	•	_	_	_	•	•	•	•	•	•	•	-	•	•	•	•	•	-	_
Crop lifters		•	005/	005/	•	005/	005/	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Vertical flexibility of knife bar	mm	225	225/-	225/-	225/-	225/-	225/–	-	-	-	-	-	-	-	-	-	-	_	-	-	-	-	-	-	-
ACTIVE FLOAT		•	•/-	•/-	•/-	●/—	●/—	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	-
Intake auger diameter (ext. / int.)		660/420	660/420	660/420	660/420	660/420	660/420	660/420	660/420	660/420	660/420	660/420	660/420	660/420	660/420	660/420	660/420	660/420	660/420	660/420	660/420	580/380	580/380	580/380	580/380
Replacement knife		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
possible adjustment range, hydraulic	mm	-	-	-	-	-	-	700	700	700	700	700	700	700	700	700	-	-	-	-	-	-	-	-	-
possible adjustment range, manual	mm	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	200	200	200	200	200	-	-	-	-
Side belt depth	mm	1079.5	1079.5	1079.5	1079.5	1079.5	1079.5	-	-	-	-	-	-	-	-	-	-	_	-	-	-	-	-	-	-
Trough depth	mm	1329	1329	1329	1329	1329	1329	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Centre belt width	mm	2000	2000	2000	2000	2000	2000	-	-	-	-	-	-	-	-	-	-	_	-	_	-	-	-	-	-
Weight (without rapeseed equipment)	kg	4950	4600/4550	4350/4300	4050/4000	3510/3425	3000/2935	4679	4395	4112	2989	2557	2334	2224	2093	1941	2824	2419	2140	2040	1926	1300	1120	2100	1980
Automatic cutterbar control																									
CONTOUR											0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
		_	_	_	_	_	_	0	_	0	0	0	-	_	-	0	-	_	_	0	0	0	0	-	0
AUTO CONTOUR		•	•	•	•	•	•	O	0	O	O	0	0	0	0	0	0	0	0	O	0	0	0	0	0
AUTO FLEX		•	•/-	•/-	•/-	•/-	•/-	_	_	_	_	-	-	-	-	_	_	_	_	_	-	-	-	-	-
Automatic parking position		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	-	_	-	-	-	-	-
Automatic operating position		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	-	-	-	-	-	-	-
Reel tractive force control		•	•	•	•	•	•	•	•	•	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Reel speed control		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Automatic reel height		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Automatic reel levelling		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	-	-	-	-	-	-	-	-	-
Automatic table control		-	-	-	-	-	-	•	•	•	•	•	•	•	•	•	-	_	-	-	-	-	-	-	-
AUTOMATIC BELT SPEED		0	0	0	0	0	0	-	-	-	-	-	-	-	-	-	-	_	-	-	-	-	-	-	-
LASER PILOT		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Rice equipment																									
					_		_				0	0	0	0	0	0	0	0	0	0	0	0	0		_
Intake auger wear protection		-	-	-	_	-	_	-	-	-														_	
Rice cutting system		_	-	_	_	-	_	-	_	-	0	0	0	0	0	0	0	0	0	0	0	0	0	_	-
Double knife system		-	_	-	-	-	_	_	_	-	_	_	_	_	_	-	_	_	_	_	_	0	0	_	_
Rapeseed equipment																									
Rapeseed knives		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	_	_	_	_	-	_	-	_	_
Rapeseed plates		_	_	_	_	_	_	•	•	•	•	•	•	•	•	•	_	_	_	_	_	_	_	_	_
Spacing: knife bar – intake auger	mm	_	_	_	_	_	_	1134	1134	1134	1134	1134	1134	1134	1134	1134	_	_	_	_	_	_	_	_	_
, , , , , , , , , , , , , , , , , , , ,																									
possible adjustment range with rapeseed equinment	mm	-	_	_	_	_	_	700	700	700	150	150	150	150	150	100	_	_	_	_	_	_	_	_	
possible adjustment range with rapeseed equipment Conveyor auger	mm	- 0	0	0	0	0	0	700	700	700	150 -	150 -	150 -	150 -	150	150 -	_	_	_	_	_	_	_	_	_

			lana	MAXFLE cutterba	rs	less
Front attachments		930	770	680	620	560
Effective cutting width	mm	9220	7696	6781	6172	5563
Effective cutting width	ft.	30.25	25.25	22.25	20.25	18.25
Drive on both sides		-	-	_	-	-
Drive on one side		•	•	•	•	•
Vertical flexibility of knife bar	mm	180	180	180	180	180
Knife divided		-	-	-	-	-
Knife undivided		•	•	•	•	•
MULTIFINGER intake auger		•	•	•	•	•
Reel and auger bearing divided		-	-	-	-	-
Reel and auger bearing undivided		•	•	•	•	•
Crop lifters		0	0	0	0	0
Replacement knife		•	•	•	•	•
Rapeseed knives		-	-	-	-	-
Additional cross augers		-	-	-	-	-
Weight	kg	2670	2290	1960	1890	1770
Automatic cutterbar control						
CONTOUR		0	0	0	0	0
AUTO CONTOUR		0	0	0	0	0
Automatic parking position		•	•	•	•	•
Automatic operating position		•	•	•	•	•
Reel speed control		•	•	•	•	•
Automatic reel height		•	•	•	•	•
Automatic reel levelling		-	-	-	-	-
LASER PILOT		0	0	0	0	0

Front attachments		SWATH UP 450
Effective pick-up width	mm	4523
Effective pick-up width	ft.	14.84
Drive on one side		•
No. of pick-up tines		392
Weight	kg	1366

Standard ○ Option □ Available — Not available

			SUNSPEED							
attachments		16-70	12-75	12-70	8-75	8-70				
er of rows		16	12	12	8	8				
ridth	cm	70	75	70	75	70				
oan length	mm	1800	1800	1800	1800	1800				
oan width	mm	311	337	311	337	311				
oan gap adjustment range	mm	30-50	30-50	30-50	30-50	30-50				
nd auger bearing										
vided		_	_	•	•	•				
ed		•	_	_	-	-				
undivided, auger: divided		-	•	_	-	-				
cement knife		•	•	•	•	•				
t	kg	3300	2820	2638	1800	1720				
natic cutterbar control										
peed control		•	•	•	•	•				
atic reel height		•	•	•	•	•				
atic reel levelling		-	-	-	-	-				

CLAAS continually develops its products to meet customers' requirements. This means that all products are subject to change without notice. All descriptions and specifications in this brochure should be considered approximate and may include optional equipment that is not part of the standard specifications. This brochure is designed for worldwide use. Please refer to your nearest CLAAS dealer and their price list for local specification details. Some protective panels may have been removed to present the function more clearly in photographs. To avoid any risks, you should never remove these protective panels yourself. In this context, please refer to the relevant instructions in the operator's manual.

All technical specifications relating to engines are based on the European emission regulation standards: Stage. Any reference to the Tier standards in this document is intended solely for information purposes and ease of understanding. It does not imply approval for regions in which emissions are regulated by Tier.

 Standard ○ Option □ Available — Not available Standard ○ Option □ Available — Not available